

3M Science.
Applied to Life.™

3M™ Conformable Double Coated Tape
93420/93425/93430

A woman with long dark hair, wearing a light-colored sweater over a white collared shirt, is seated at a wooden table. She is looking down at a tablet computer she is holding. To her right, a man in a dark blue polo shirt is seated, holding a white coffee cup to his lips. The background features a brick wall and a large window with a view of the outdoors. The bottom of the image is overlaid with a large orange and yellow diagonal graphic.


**A new level of bonding
performance at your fingertips.**

Right performance. Right price.

Advanced Conformability for Lens Bonding.

New 3M adhesive and carrier technology enables performance levels previously not possible for a double coated tape with PET carrier. These proprietary technologies make this tape more drop resistant and shock absorbing and offer an exceptional balance of properties:

- ▶ **Excellent anti-lifting** — at both room and elevated temperature
- ▶ **Great drop resistance** — absorbs the impact energy from everyday use
- ▶ **Great chemical resistance** — resistance to finger touches and daily consumer chemicals
- ▶ **Good push-out strength** — handles common screen stress
- ▶ **Temporary removability** — makes temporary rework easier
- ▶ **Versatile adhesion** — strong bond for both Low Surface Energy (LSE) materials like plastics and High Surface Energy (HSE) materials like glass and metal

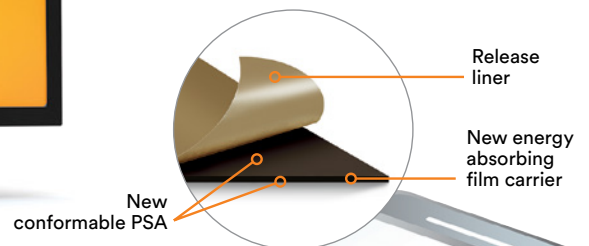

Ideal for smartphones, tablets, notebooks, wearables, VR/AR and more



Head-to-head comparison with PE and acrylic foam tapes.




Test Method:
Anti-Lifting



Test Method:
Tumble Drop



Test Method:
Edge Drop




Test Method:
Push Out

3M™ Conformable Double Coated Tape 93425 vs. Competitor A (PE Foam Tape) – 0.25mm

▶ 3M™ Conformable Double Coated Tape 93425 has better drop resistance than Competitor A.

Anti-Lifting

Tape	Lifting Distance
93425	0mm
Competitor A	0mm

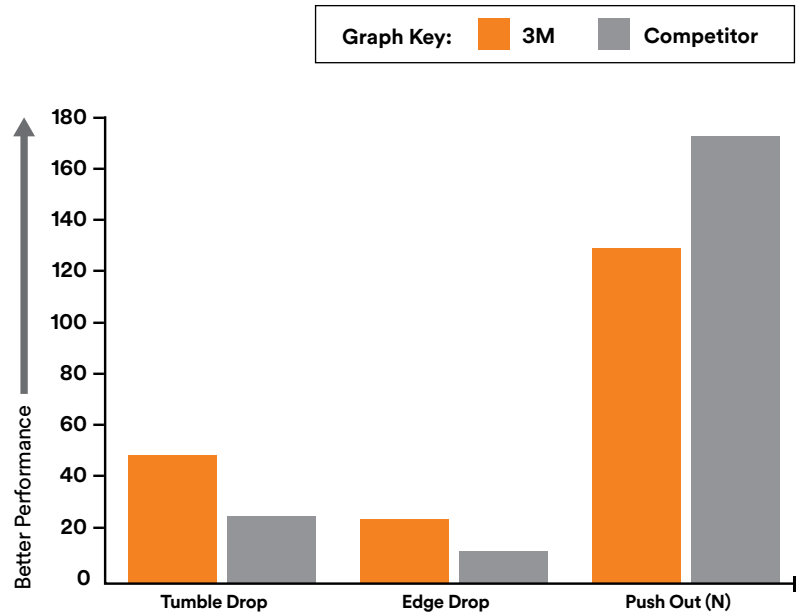


3M™ Conformable Double Coated Tape 93430 vs. Competitor B (Acrylic Foam Tape) – 0.3mm

▶ 3M™ Conformable Double Coated Tape 93430 has better drop resistance and anti-lifting than Competitor B.


Anti-Lifting

Tape	Lifting Distance
93430	0mm
Competitor B	4mm

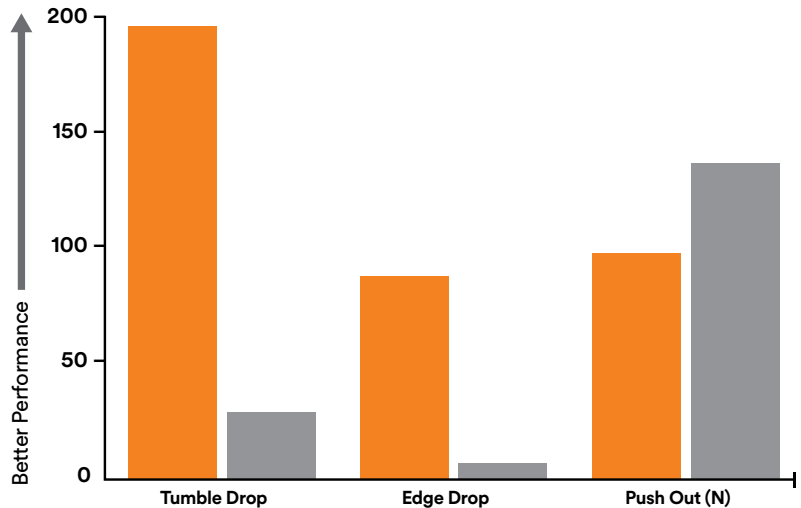

Product Selection

Product Number	PSA Faceside Adhesive	Carrier Thickness	Carrier Type	PSA Backside Adhesive	Total Tape Thickness (not including liner)	Adhesive Type	Release Liner
93420	1.5mil (0.037mm)	5mil (0.125mm)	Energy Absorbing Core, Black	1.5mil (0.037mm)	8mil (0.20mm)	Conformable Acrylic for HSE and LSE Substrates	Polycoated Kraft PCK
93425	2.5mil (0.062mm)	5mil (0.125mm)	Energy Absorbing Core, Black	2.5mil (0.062mm)	10mil (0.25mm)	Conformable Acrylic for HSE and LSE Substrates	Polycoated Kraft PCK
93430	3.5mil (0.087mm)	5mil (0.125mm)	Energy Absorbing Core, Black	3.5mil (0.087mm)	12mil (0.30mm)	Conformable Acrylic for HSE and LSE Substrates	Polycoated Kraft PCK

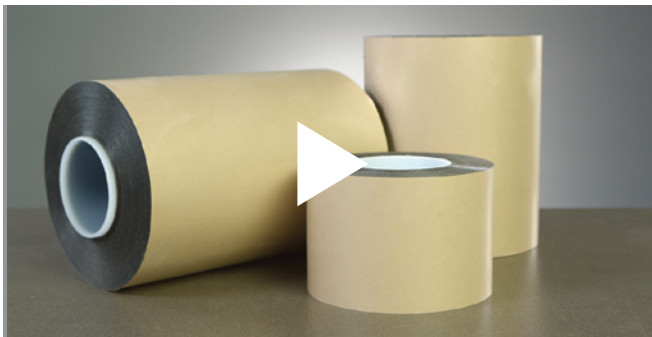

Anti-Lifing Demo Video



Hands-on Demo: Drop Resistance Demo Card



This tape is produced via a solventless manufacturing process. Your purchase of this tape, rather than purchase of tapes made via a typical solvent-based manufacturing process, results in GHG emissions reductions that may be counted by your company, called Scope 3, Category 1 GHG Reduction. Scope 3 emissions are all indirect emissions that occur in the value chain of the reporting company, including both upstream and downstream emissions.

For example, your annual purchase of **40,000 sqm** of 3M™ Conformable Double Coated Tape 93425 results in an estimated **22 ton reduction** in your Scope 3 Category 1 CO2e emissions.



Refer to [3M.com/regs](https://www.3m.com/regs) for regulatory and chemical of interest certification.

Refer to [3M.com/SDS](https://www.3m.com/sds) for article information sheet.

WRI GHG Protocol Scope 3 definition: Estimate based on avoided process solvent treatment via thermal oxidizers; does not account for other life cycle impacts.

Product Use: All statements, technical information and data contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

Warranty, Limited Remedy, and Disclaimer: Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. User is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. Unless an additional warranty is specifically stated on the applicable 3M product packaging or product literature, 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



Electronic Device Bonding
3M Center, Building 225-3S-06
St. Paul, MN 55144-1000

3M China
8 Xing Yi Road, Maxdo Centre
Shanghai, China 200336

3M Korea
82, Uisadang-daero,
Yeongdeungpo-gu,
Seoul, 150-705, Korea

3M Taiwan
No 95, Sec 2, Dunhua S Road
Taipei, Taiwan 10682

Phone 1-800-223-7427
Web [3M.com/Converter](https://www.3m.com/Converter)

© 3M 2016. All rights reserved. 3M is a trademark of 3M Company.
E70-0713-4618-6